

Effect of Binder on Viscosity with Shear Rate

Vishal Phaugat, Hari Mohan Rai, Subham Gupta and Rohit Thakran

Abstract: This paper represents the effect of binder on viscosity and its experimentation. The experimental result briefs:

1. With no binder added, the initial viscosity of the slurry was 35mpas.
2. As the percentage by parts of the binder was increased to 3 and then to 6 ,the viscosity of the slurry decreased to 32m pas which was the minimum viscosity value reported
3. After further increasing the binder content, the viscosity again started to increase and increased upto the binder content of 16(by parts),and thus achieved the value of viscosity 40mpas. The same trend was observed for both the mean value of viscosity and also the peak value of viscosity at maximum shear rates.
4. The peak value also decreased first from 35mpas to 32mpas, on increasing the binder content from 0 to 6. After that it increased to 40 mPas on further increasing the binder to 16.

Key words: Rheology, Binder, Viscosity, Shear Rate.

I. INTRODUCTION

This reports starts with the study of effect of varying the binder and then dryness fraction on the viscosity of c-60and c-90 coating emulsion by varying the temperature. This effect is especially important for the paper coatings that have to undergo a wide range and high values of temperature particularly in dryness fraction. So considering the rheological behaviour of the coating at different temperatures, the optimum and maximum permissible temperature for working with paper coating can be determined. After this the behaviour of the viscosity with different compositions and contents of coating slurry is observed. This gives the dependence of the rheology of the coating on the type and shape of the particles. Viscosity is a measure of a fluid's resistance to an applied shearing force [1]. In a coating, viscosity is a measure of the ease with which the continuous phase deforms and allows the pigment particles to slide over each other [2]. If the volume of the continuous phase is large, the particles of the solid phase move more independently and slide past each other more easily [3]. Increasing the volume of the continuous phase thus reduces coating viscosity. When a coating is put under shear, only the continuous phase is subjected to that shear; the solid phase just reduces the area available for shearing [4].

Vishal Phaugat, Subham Gupta, Rohit Thakran are the student of ECE Department in Dronacharya College of Engineering, Gurgaon, India. Email: Vishalphaugat968@gmail.com, sgupta1994.08@gmail.com, thekran1994@yahoo.com , Hari Mohan Rai is working as an Assistant Professor in department of ECE at Dronacharya College of Engineering, Gurgaon, India. hmrail@yahoo.com

II. RHEOLOGY

It is defined as the science of the deformation and flow of matter that is how the materials respond to the stress applied to them [5].

There are two types of deformation:

1. Reversible (Solid like behaviour): it is also known as elastic deformation .In which the internal structure remains intact.
2. Irreversible (Liquid like behaviour): it is also known as flow deformation .In which the internal structure is destroyed.
3. Reversible + Irreversible (frequency dependent behaviour): it is also known as visco-elastic deformation.

For solid materials, the elastic properties are most important while, for liquid materials, the flow properties are most important. Materials can also exhibit viscoelastic behaviour in which there is both elastic and flow deformation. For viscoelastic materials, there is a limited degree of recovery once the stress is removed-in fact, the material will have fading recovery of its prior state [6]. This highlights another aspect of rheology, namely, the time dependent or dynamic behaviour of materials. Paper coating formulations have complex time dependent rheological behaviour. During the coating process, the coating formulation experiences a wide range of shear stress lasting from a few microseconds upto several minutes .As a result, paper coating rheology is complicated and remains an active area of research. The capability to forecast a material's performance provides the materials designer with an significant tool in developing future products [7].

Despite its complexity, understanding the rheology of paper coatings is important for two reasons.

1. The rheological behaviour of the paper coating formulations is a key factor influencing runnability, water retention and coating holdout. Understanding how to control and classify the coating rheology is critical for achieving good runnability and optimum placement of the coating [8].
2. Second rheology is a powerful tool for characterizing the interactions between the different components of a paper coating formulation. It also serves as a quality control measurement. Understanding the different types of information from rheological measurements can greatly speed up and improve the design of new coating formulations [9].

Shear rate dependent rheology:

- Typically, shear stress versus shear rate is plotted on a linear scale while viscosity versus shear rate is plotted on a log scale. On a log-log scale, the plot for the viscosity versus shear rate is often a straight line [10].
- Known as POWER LAW fluid and is quite common

for polymer fluids and colloidal systems of paper coatings.

- The equation for the viscosity versus shear rate is:

$$\tau = K\dot{\gamma}^n$$

III. TYPES OF NON-NEWTONIAN FLUIDS

A. PSEUDOPLASTIC or SHEAR THINNING

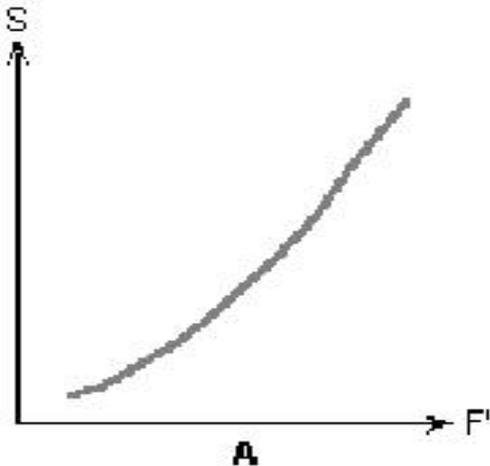


Fig.1. Shear Versus force

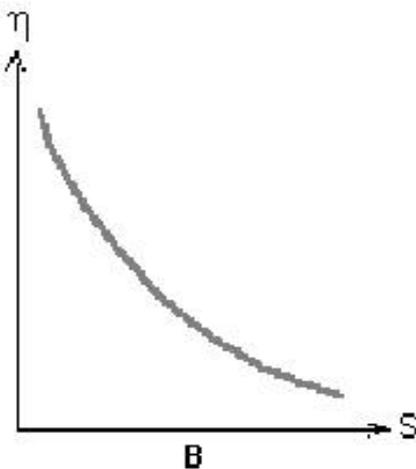


Fig. 2. Viscosity versus Shear Rate

- The Viscosity decreases with increasing the Shear Rate (fig 1).
- The Shear Thickening Index $n (<1)$ is less than One (fig 2).

B. DILATANT or SHEAR THICKENING

- The Viscosity of these fluids increases with the Shear Rate (fig 3).
- The Shear Thickening Index $n (>1)$ is less than One (fig 4).

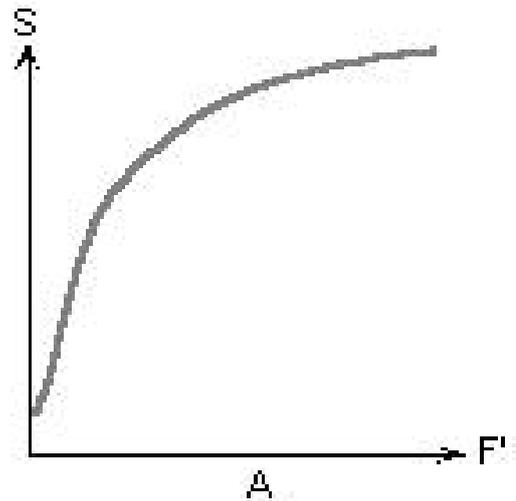


Fig.3. Shear versus Force

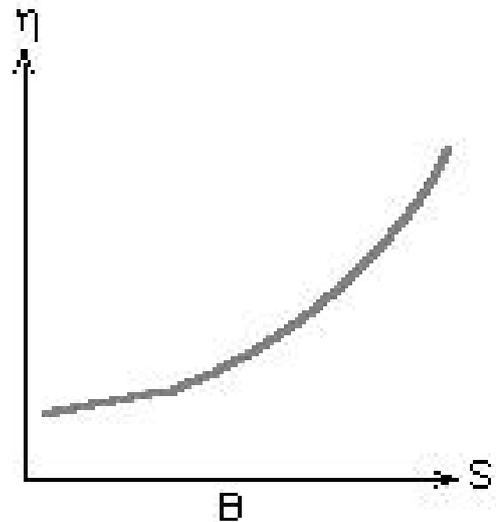


Fig.4. Viscosity versus Shear Rate

IV. RESULT AND DISCUSSION

At low binder concentrations, the viscosity first decreases on addition of the binder. However, at higher binder concentrations, that is when the amount of binder in the coating becomes significant, the viscosity starts to increase with the increase in the binder content. This may be attributed to the fact that as at lower concentrations, the binder particles enter the crystal lattice of the coating pigments and disturb the regular structure. The binder particles are not contributing much to the joining of different particles by their glueing ability, due to their small amount as compared to the pigment particles. So, the viscosity initially decreases.

It is observed that from figure 5, the viscosity increases later on, at higher binder percentages, due to increasing the binder content. This is due to the more thick and viscous (tacky) nature of the binder than the pigment particles. So, the binder makes the pigment particles to stick together in a much better way due to its glueing ability and thus increases the viscosity of the coating. More is the amount of binder, more is

the resistance to motion offered by the particles of the coating

and thus, more is the viscosity.

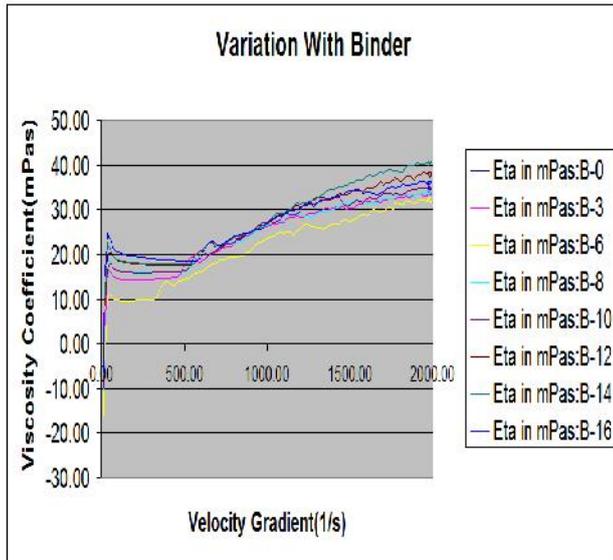


Fig.5. Variation of viscosity with dryness

It should be taken into account that for each individual case, as the velocity gradient is increased, the viscosity of the coating first decreases with increasing shear and on further increasing the shear rates, the viscosity then starts increasing which is shown in table 1.

Binder Content (% by parts)	Viscosity Coefficient (mPas)
0	29.78
3	29.10
6	28.67
8	31.67
10	32.69
12	35.06
14	37.29
16	37.86

V. RESULTS

From the benchmarking tests we performed for different softwares we came to know that the softwares having the large file size tend to use more CPU than the ones having file size lower than them. This can be seen as all the games which were used in the tests (i.e Sleeping Dogs, FIFA 2013, CS-Global Offensive) have large area than other softwares and as a result they use more CPU. Which we can clearly study from the graph above that the Instructions Processes per Second (FLOPS-Floating Point Operations Per Second) for these games is higher. Comparison between CPU usages And MFLOPS (Million Floating Point Operations per Second) for various applications have been shown in fig. 4.

Whereas this is does not hold true for the memory used. As CS-Global Offensive uses the most CPU but the memory

usage of the same is comparatively quite low. So we found out that File size of the software being used and the memory it uses to process the data are not the only reasons which determine the speed of the CPU. Thus along with these reasons the type of file being processed plays an important role in determining the speed and efficiency of the microprocessor.

As it was found during the experiment that the Paper Coatings followed a different pattern in their variation with the Shear Rate (rotation speed of job)

- The viscosity of slurries and suspensions is dependent of the arrangement of individual particles, on the solids volume fraction and the maximum packing volume.
- At low shear rates, there are two possible situations; for low solids and non interacting particles, the particles have a random arrangement due to BROWNIAN MOTION.
- And in this case, it will exhibit Newtonian flow behaviour with low shear viscosity $\dot{\eta}^0$.
- If the particles interact to form large aggregates or a network structure, the yield behaviour results and the viscosity becomes infinite as shear rate approaches zero $\dot{\eta}$.
- As the shear rate increases, the suspension exhibits Pseudoplastic(Shear Thinning) behavior. Under shear, particles orient themselves into layers that can flow past each other, causing a decrease in the Viscosity.
- Once the suspension particles are aligned into layers (Shear Layers), the suspension again has a constant Newtonian viscosity of $\dot{\eta}$.
- At high solids fraction or high shear rates, these shear layers can become distorted and disoriented thereby increasing the viscosity (Shear Thickening) behavior.
- The overcrowding and disorder in the particles leads to increase in the viscosity.

VI. CONCLUSION

It was observed during all the experiments that the viscosity varied in a definite pattern with the shear rate. The curves for Viscosity versus the Shear Rate (which was the job speed for the experiment) were all of the same shape. As the shear rate (job rotation speed) was increased, for all the cases, the viscosity first decreased with the increasing shear and achieved a minimum point. After this minimum value of viscosity, if the shear rate was increased further, the viscosity showed to rise with the increasing shear rate.

REFERENCES

- [1] Alberty, R. A., "Physical Chemistry", John Wiley and Sons, New York, 1987, p.673.
- [2] Lepoutre, P., Tappi 59 (12): 70(1976).
- [3] DeVries, R. J., "The effect of viscosity on binder migration", Bachelors thesis, Western Michigan University, Kalamazoo, April 1970.
- [4] Triantafillopoulos, N. G., "Shear induced anisotropy on the rheology of solids dispersions", Masters thesis, Western Michigan University, Kalamazoo, August 1985.

- [5] D. Vader, H. Wyss "Introduction to Rheology", Weitzlab group meeting tutorial.
- [6] Carreau, P.J., De Kee, D., and Chhabra, R.P., "Rheology of Polymeric Systems: Principles and Applications", Hanser, Munich, pp. 68–72, 1997.
- [7] Engström, G. and Rigdahl, M., "The Effect of Some Polymer Dispersions on the Rheological Properties of Coating Colours", Nord. Pulp Paper Res. J., vol. 5, 4, 161-171, 1990.
- [8] P.J.T. Mills, J.P.K. Seville, P.C. Knight, M.J. Adams, "The effect of binder viscosity on particle agglomeration in a low shear mixer/agglomerator", Powder Technology, Volume 113, Issues 1–2, Pages 140–147, Nov 2000.
- [9] S.T. Keningley, P.C. Knight, A.D. Marson, "An investigation into the effects of binder viscosity on agglomeration behaviour, Powder Technology, Volume 91, Issue 2, Pages 95–103, May 1997.
- [10] Johansen A, Schaefer T., "Effects of interactions between powder particle size and binder viscosity on agglomerate growth mechanisms in a high shear mixer", Eur J Pharm Sci., 12(3), 297-309, Jan 2001.

Shivam Thakur, Sidharth Kumar, Suman Pawar Pawar are the student of ECE Department in Dronacharya College of Engineering, Gurgaon, India. They are doing their work on Microprocessor & its application. They are also the active member of ISTE & IETE.



HARI MOHAN RAI was born in India, in 1986. He graduated from Vinayaka Mission's University in 2009, and received his Master of Engineering in Electrical Engineering (Control System) from Government Engineering College, Jabalpur in 2012 with Gold Medal. Now he is the Assistant Professor in the department of

Electronics and Communication Engineering, Dronacharya College of Engineering, Gurgaon, India. He has authored number of papers which have been published in many National and International journals including two papers in IEEE Xplore. He is serving as a Reviewer for International Journal of Engineering, Computers and Electrical engineering Journal (Elsevier), IJSET and IJERT. He is also an active member of various international Societies such as IEEE Professional Member, The Society of Digital Information and Wireless Communications (SDIWC) and International Association of Engineers (IAENG). His area of expertise is Bio-signal processing, control system, image processing, neural network, pattern classification and artificial intelligence.